




Features

- Durable stainless steel frame
- Water filter
- Current overload protection
- 5m power lead
- Shock absorbing buffers
- Brass pump head
- Ceramic-coated stainless steel pump pistons
- Continuously adjustable pressure control
- Dry-run safety
- Total-Stop system
- Trigger gun with safety catch
- Dirtkiller rotating nozzle lance with stainless steel nozzle protector
- 10m Steel double braided high-pressure hose

Technical Specifications

Kränzle Hire Version

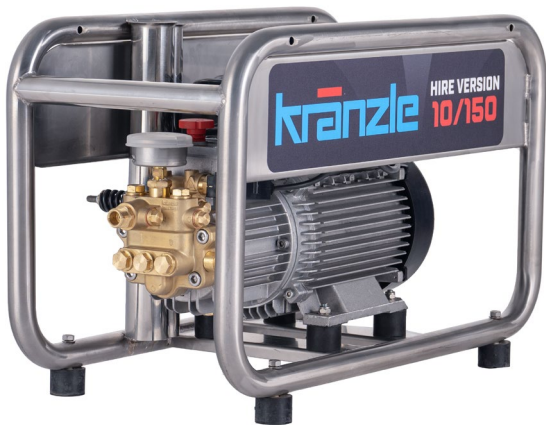

Details	10/150	13/180
Operating pressure	30 - 150 bar	30 - 180 bar
Max. admissible overpressure	165 bar	200 bar
Water output	10 l/min	13 l/min
Nozzle size (flat jet)	20035	25045
Dirtkiller lance	Yes	Yes
Max. inlet water temperature	60°C	60°C
Chemical injector	Additional	Additional
Connected load - 50Hz	230V, 14 A	400V, 8.5 A
Motor speed	1 400 r.p.m	1 400 r.p.m
Motor rating	2.4kW	4kW

Specialist equipment for professional application