




Features

- Solid stainless steel frame
- Comfortable carrying handles
- Convenient, space saving and compact design
- 2:1 Reduction gearbox
- Shock absorbing buffers
- Brass pump head
- Ceramic-coated stainless steel pump pistons
- Continuously adjustable pressure control
- Dry-run safety
- Speed (idling) control – optional extra
- Water intake filter
- 10m Steel double-braided high pressure hose
- Trigger gun with safety catch
- Stainless steel lance with flat jet nozzle

Technical Specifications

Kränzle Profi B13/150F - Torx Contractor

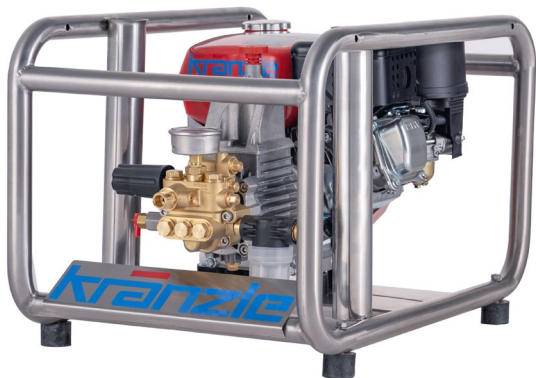

Details	B13/150
Operating pressure	30 - 150 bar
Max. admissible overpressure	170 bar
Water output	13 l/min
Nozzle size (flat jet)	2505
Dirtkiller lance	Additional
Max. inlet water temperature	60°C
Hose drum	Additional
Chemical injector	Additional
Engine	Torx XT196cc with 2:1 Reduction gearbox
Engine power	6.5 HP

Powerful, versatile and convenient