

# Steam Power Plus

17,8<sup>kW</sup> - 18,4<sup>kW</sup> - 21<sup>kW</sup> - 21,6<sup>kW</sup> - 35,8<sup>kW</sup> - 39,4<sup>kW</sup>

## STEAM CLEANER

Boiler	Stainless-steel AISI 304 with interchangeable heating elements							
Body	Stainless-steel AISI 304 BA							
Power supply	V - Hz	3~ 400 - 50 (60Hz on request)						
Boiler output	kW/h	10,8	14,4	18	21,6	28,8	36	
Maximum output	kW/h	17,8	18,4	21	21,6	35,8	39,4	
Boiler volume	l	13						
Operating pressure	bar	from 1 to 10						
Water tank	l	14						
Detergent tank	l	14						
Steam production	g/min	291	388	485	582	776	970	
	Kg/h	17,5	23	29,1	35	46,5	58	
Steam temperature	°C	165 - 183						
Detergent temperature	°C	90 - 160						

## HIGH PRESSURE WATER MODULE

Motor output	kW/h	4
Water flow	l/min	13
Operating pressure	bar	from 0 to 150

## VACUUM CLEANER

Power output	kW/h	3
Drum capacity	l	14   43
Air flow	m <sup>3</sup> /h	320
Depression	mm	3200

## VARIOUS

Weight	Kg	180
Cable	m	8
Dimensions (generator)	cm	H.166 x L.69 x W. 95,5 drum 43l
Dimensions (pallet)	cm	120x80x165
Pallet/unit	pz	1



Stainless-steel

## Technical features

Operating pressure 10 bar	Water pressure 150 bar	Water mains	Water & detergent tanks	Automatic water refilling	Detergent injection	Overheated water injection	Power regulation switch	Steam pressure regulation	Water pressure regulation	Control panel	Induction turbine	Boiler maintenance signal

**Steam cleaner with stainless-steel body and boiler, designed for industrial use and able to deliver dry saturated steam at 183° C and high-pressure water up to 150 bar:**

- Equipped with a wet/dry vacuum cleaner with an induction turbine and drainage pipe.
- A sturdy structure, a fully electric operation and the compact size allows its use in any environment, both outdoors (watertight protection IPX5) and indoors (e.g. in production lines).
- All steam cleaner functions can be managed on the electronic control panel.
- Equipped with accessories basket, double hose holder, lance holder, cable holder and front 360° swivel wheels with safety brakes.



## Features

Wet/dry industrial vacuum cleaner (3kW) with induction turbine: 14 l - 43 l



Detergent tank - 14 liters



- High pressure pump level indicator
- Detergent tank level indicator
- Hose holder
- Geyser lance holders

Pump pressure regulator and pressure gauge



Steam outlet 12P and high pressure water outlet



Dimension

### CONTROL PANEL

- Display to visualize temperature and pressure levels, working hours and boiler cleaning signal
- Steam flow and pressure regulation
- Buttons and indicators for the complete control of the parameters of the steam cleaner



### STEAM POWER

Version with steam and high pressure washer



Vacuum inlet

Drain hose

Water tank 14 liters

- Water tank level indicator
- Hose holder & accessories basket
- Cable holder

Water mains connection

Electric plugs - 8m:

- IEC309/16A Mod. 10,8 kW
- IEC309/32A Mod. 14,4 - 18 - 21,6 kW
- IEC309/63A Mod. 28,8 - 36 kW

Anti-scratch rubber wheels 360° and safety brakes

## Optional accessories

Steam Power Plus can be used with the following accessories:

### GEYSER 1 10bar

Steam accessories



### GEYSER 2 10bar/150bar

Steam/water accessories



### RADAMES 10bar

Steam/vacuum accessories








FOOD  
INDUSTRY



MECHANICAL  
INDUSTRY

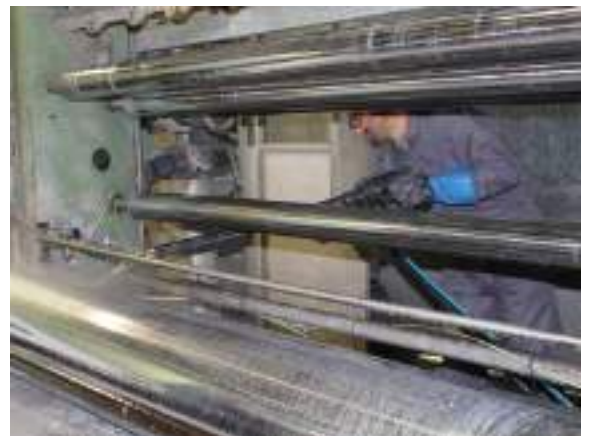

TRASPORT  
INDUSTRY



CONVEYOR  
BELT

