



Steam Tech



3,75<sup>kw</sup> - 8,5<sup>kw</sup> - 12,1<sup>kw</sup> - 15,6<sup>kw</sup>

\*\*\*\*\*

## STEAM CLEANER

Boiler	Stainless-steel AISI 304 with interchangeable heating elements					
Body		PE - Varnished steel				
Power supply	V - Hz	1~ 230 - 50/60	3~ 400 - 50/60			
Boiler output	kW/h	3,6	7,2	10,8	14,4	
Maximum output	kW/h	3,75	8,5	12,1	15,6	
Boiler volume	I		7			
Operating pressure	bar	6	10			
Water tank	I		15			
Detergent tank	I		15			
Steam production	g/min	97	194	291	388	
	Kg/h	5,9	11,6	17,5	23	
Steam temperature	°C	165		183		
Detergent temperature	°C	90 - 160				
VACUUM CLEANER						
Power output	kW/h	1,2				
Drum capacity	I	14				
Air flow	m3/h	200				
Depression	mm	2200				
VARIOUS						
Weight	Kg	56				
Cable	m	8				
Dimensions (generator)	cm	H.86 x L.54 x W. 100				
Dimensions (pallet)	cm	113x58x86				
Pallet/unit	pz	1				



eno



















**Technical features** 



pressure 6 bar

Operating pressure 10 bar



refilling




signal

## Steam cleaner designed for industrial use with stainless-steel boiler and polyethylene body.

- Able to deliver dry saturated steam 183° or 165°C.
- Equipped with a wet&dry vacuum cleaner, a float that controls its operation
- · The sturdy structure, the fully electric operation and the compact size allows its to usage in any environment.
- All steam cleaner functions can be managed on the electronic control panel.
- Equipped with hose/cable holder, accessories basket and 360° swivel front wheels.



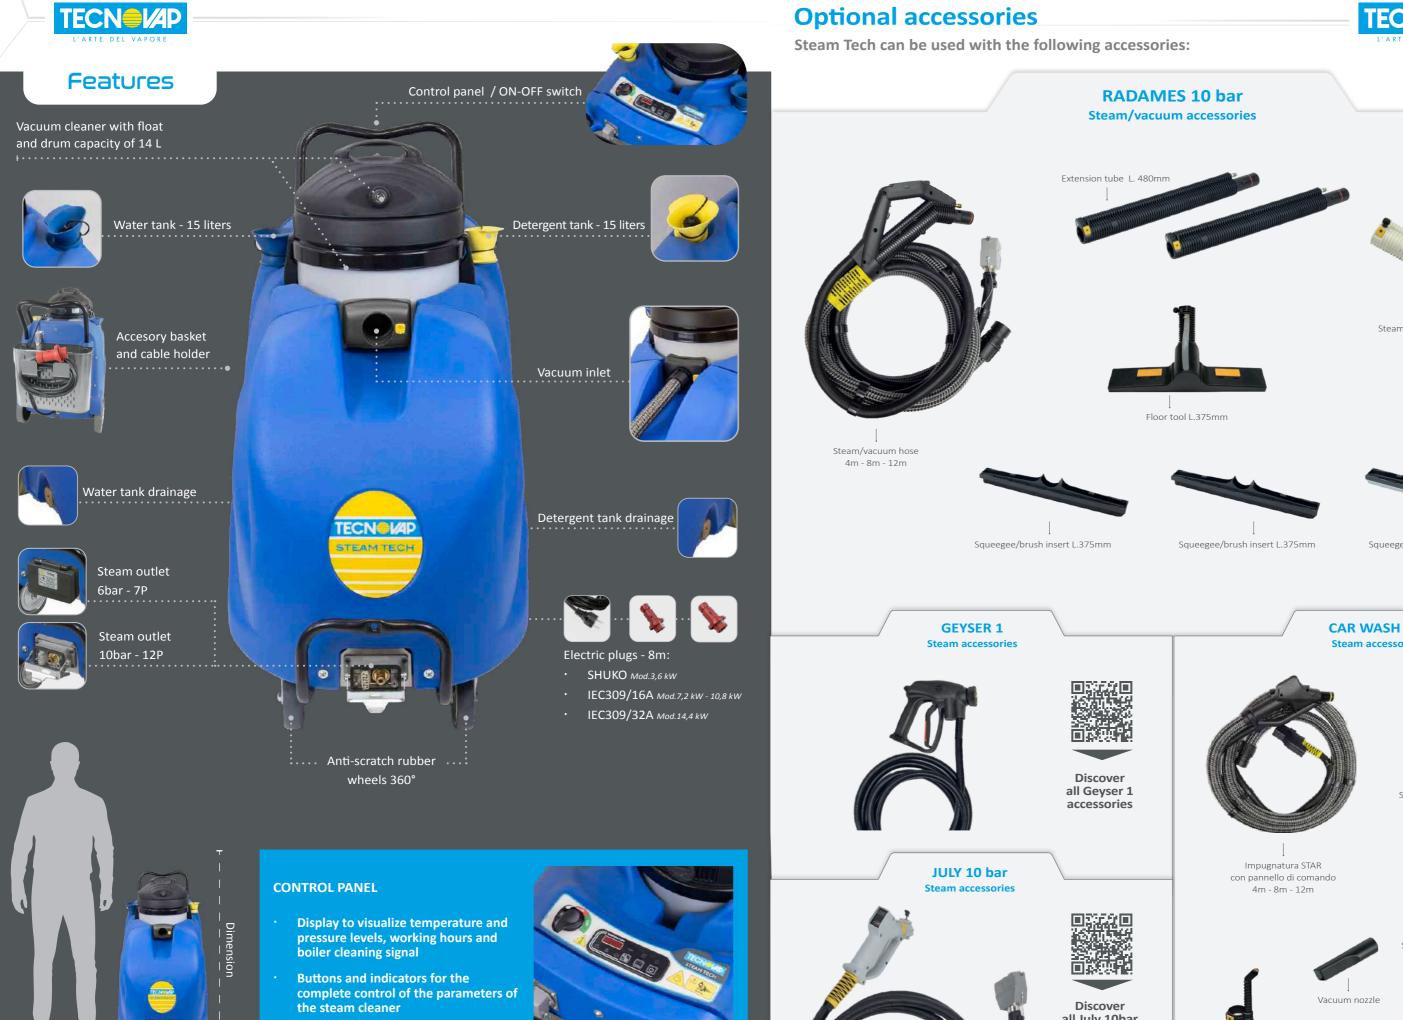

all July 10bar accessories







Steam/vacuum turbo lance



Squeegee/squeegee insert L. 375mm

## **CAR WASH KIT** Steam accessories



Steam/vacuum upholstery nozzle with horse hai bristels



Stainless steel upholstery nozzle





Microfiber bonnet

## Steam Tech APPLICATIONS





CAR WASH







FOOD INDUSTRY















