

**kränzle**<sup>®</sup>

MADE IN GERMANY



## THE NEW X-SERIES COLD WATER HIGH-PRESSURE CLEANERS

INNOVATIVE HIGH-PERFORMANCE MACHINES FOR OPTIMUM CLEANING RESULTS

## DESIGN MEETS FUNCTIONALITY

The new X-series offers cleaning performance and operability at the highest level. Due to the high operating pressure, combined with the innovative design, even demanding cleaning jobs are no obstacle. Whether floors, walls or other objects. The high-performance models guarantee optimal results. Thanks to the wide range of accessories in combination with the D12 plug-in system, even changing cleaning tasks are completed within the twinkling of an eye.

### ACCESSORY BOX

with integrated holder for Kränzle foam lance, for practical storage of the accessories

### COMFORTABLE HOSE REEL

Space-saving storage of high-pressure hose with twist-stop screw connection

### LARGE STAINLESS STEEL PRESSURE GAUGE

Easy reading of the operating pressure

### OFF-ROAD CAPABILITY AND STABILITY

robust chassis for easy transport and high stability

### ORGANIZER SYSTEM

practical holders for high-pressure gun and cleaning lances



Fig.: X 10/140 TST | 603610



### INNOVATIVE DESIGN

With its upright design, operation and transport are even more comfortable. The models of the X-series can simply be operated standing up and the pressure gauge can be read easily. Two large wheels and stable legs ensure easy transport and safe standing at all times.






## PROVEN KRÄNZLE QUALITY



### AXIAL PUMP

The heart of every Kränzle high-pressure cleaner is the pump head made of forged special brass. The axial pump of the X-series guarantees a long service life due to low-wear components.

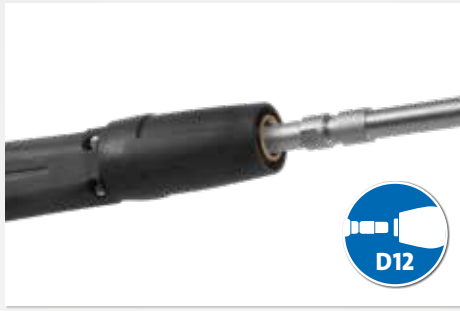

### QUICK RELEASE PLUG-IN SYSTEM

Intelligent and reliable: The quick release plug-in system with hardened stainless steel components ensures simple and always safe connection of the trigger gun to the lance.



### SLOW-RUNNING ELECTRIC MOTOR

The X 8/150 TST is equipped with a 4-pole electric motor for continuous operation. Its low speed of 1400 rpm reduces the starting current and thus ensures less wear and reduces noise.

## OPTIONAL SPECIAL ACCESSORIES



41881

### Round Cleaner UFO long | $\varnothing$ 300 mm

- for easy and efficient cleaning of small and medium-sized surfaces



410506

### Rotating washing brush | $\varnothing$ 180 mm

- for gentle cleaning of sensitive surfaces



SPOT JET



FLAT-JET



135303

### Foam lance | 1 Liter

- Production of highly effective foam
- adjustable spraying angle (spot jet - flat-jet)



NOZZLE WITH FRONT BORE



125502-F

### Pipe cleaning hose with nozzle | 20 m

- for the effective cleaning of pipes and drains



132600

### Spray guard | 285 x 190 mm

- for cleaning surfaces without splashing water
- applicable for all washing lances



129502

### Wall holders Premium

- for the storage of up to four cleaning lances and a foam lance



412711

### Kränzle Neutral | 5 Liter

- Universal cleaner for removal of strong contaminations (pH value\*: 10.9)



412721

### Kränzle Plus | 5 Liter

- Special cleaner to degrease and clean (pH value\*: 13.2)



412731

### Kränzle Marine | 5 Liter

- Highly alkaline intensive cleaner: dissolves soot, oil and grease stains (pH value\*: 13.5)

### Important note:

When using chemical cleaning agents, observe the respective regulations, provisions, safety notes and safety data sheets. Safety data sheets under: [www.kraenzle.com/sda](http://www.kraenzle.com/sda)







\*pH value: Undiluted  
We recommend testing the cleaning agent on the surface to be cleaned before starting.

The complete accessories programme incl. D12 plug-in system you can find here >>



# TECHNICAL HIGHLIGHTS

## EQUIPMENT

-  Quick release plug-in system D12
-  Kränzle axial pump
-  Totalstop system
-  Continuous pressure regulation
-  Comfortable hose reel
-  15 m high-pressure hose with twist-stop screw connection



MODEL	X 8/150 TST	X 10/140 TST
Ord.no. <b>TST</b> incl. hose drum	<b>603600</b>	<b>603610</b>

## TECHNICAL DATA

Operating pressure	bar   MPa	30-150   3-15	30-140   3-14
Water output	l/min   l/h	8   480	10   600
Admissible overpressure	bar   MPa	170   17	160   16
Motor speed	Rpm	1400	2800
Connection	V   ~   Hz   A	230   1   50   9.8	230   1   50   12.8
Power intake   Power output	kW	2.25   1.7	2.95   2.2
Power supply cable	m	5	5
Dimensions L   W   H	mm	470   360   875	470   360   875
Weight	kg	33	33

## LIEFERUMFANG

High-pressure hose	m   Ord.no.	15 (DN6)   498000	15 (DN6)   498000
Trigger gun with safety catch	Model   Ord.no.	Starlet 4   12525	Starlet 4   12525
Lance with regulating nozzle	Nozzle   Ord.no.	○ 03   12435-M2003	● 042   12435-M20042
Lance with Dirtkiller	Nozzle   Ord.no.	○ 03   12438-03	● 042   12438-042

**YOUR DEALER WILL BE GLAD TO ADVISE YOU!**