



Steam Power Plus

17,8^{kW} - 18,4^{kW} - 21^{kW} - 21,6^{kW} - 35,8^{kW} - 39,4^{kW}

STEAM CLEANER								
STEAM CLEANER								
Boiler	Stainless-steel AISI 304 with interchangeable heating elements							
Body		Stainless-steel AISI 304 BA						
Power supply	V - Hz		3~ 400 - 50 (60Hz on request)					
Boiler output	kW/h	10,8	14,4	18	21,6	28,8	36	
Maximum output	kW/h	17,8	18,4	21	21,6	35,8	39,4	
Boiler volume	1		13					
Operating pressure	bar		from 1 to 10					
Water tank	1		14					
Detergent tank	1		14					
Steam production	g/min	291	388	485	582	776	970	
	Kg/h	17,5	23	29,1	35	46,5	58	
Steam temperature	° C		165 - 183					
Detergent temperature	° C	90 - 160						
HIGH PRESSURE WATER MO	DULE							
Motor output	kW/h	4						
Water flow	l/min	13						
Operating pressure	bar	from 0 to 150						
VACUUM CLEANER								
Power output	kW/h	3						
Drum capacity	I		14 43					
Air flow	m3/h		320					
Depression	mm		3200					
VARIOUS								
Weight	Kg		180					
Cable	m		8					
Dimensions (generator)	cm		H.166 x L.69 x W. 95,5 drum 43I					



Technical features





Dimensions (pallet)

Pallet/unit



cm

pz





120x80x165















Operating pressure 10 bar

pressure 150 bar

detergent tanks

Steam cleaner with stainless-steel body and boiler, designed for industrial use and able to deliver dry saturated steam at 183° C and high-pressure water up to 150 bar:

- Equipped with a wet/dry vacuum cleaner with an induction turbine and drainage pipe.
- · A sturdy structure, a fully electric operation and the compact size allows its a usage in any environment, both outdoors (watertight protection IPX5) and indoors (e.g. in production lines).
- · All steam cleaner functions can be managed on the electronic control panel.
- Equipped with accessories basket, double hose holder, lance holder, cable holder and front 360° swivel wheels with safety brakes.





Features

Wet/dry industrial vacuum cleaner (3kW) with induction turbine: 14 l - 43 l



Detergent tank - 14 liters



- High pressure pump level indicator
- Detergent tank level indicator
- Hose holder
- Geyser lance holders

Pump pressure regulator and pressure gauge



Steam outlet 12P and high pressure water outlet



STEAM POWER



····· Vacuum inlet

····· Drain hose

Water tank 14 liters



- Water tank level indicator
- Hose holder & accessories basket
- Cable holder



Water mains connection









Electric plugs - 8m:

- IEC309/16A Mod. 10,8 kW
- IEC309/32A Mod.14,4 18 21,6 kW
- IEC309/63A Mod.28,8 36 kW

CONTROL PANEL

- Display to visualize temperature and pressure levels, working hours and boiler cleaning signal
- Steam flow and pressure regulation
- **Buttons and indicators for the complete** control of the parameters of the steam cleaner




Optional accessories



Steam Power Plus can be used with the following accessories:

GEYSER 1 10bar Steam accessories

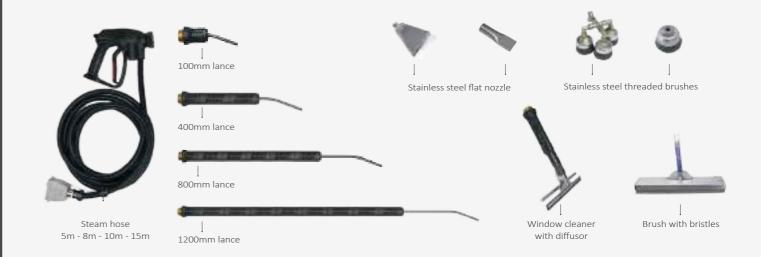

GEYSER 2 10bar/150bar



RADAMES 10bar Steam/vacuum accessories









FOOD INDUSTRY













TRASPORT INDUSTRY

CONVEYOR BELT









